


## Illuminated Pushbutton Switch

Model KB19 - Part No: HG1320

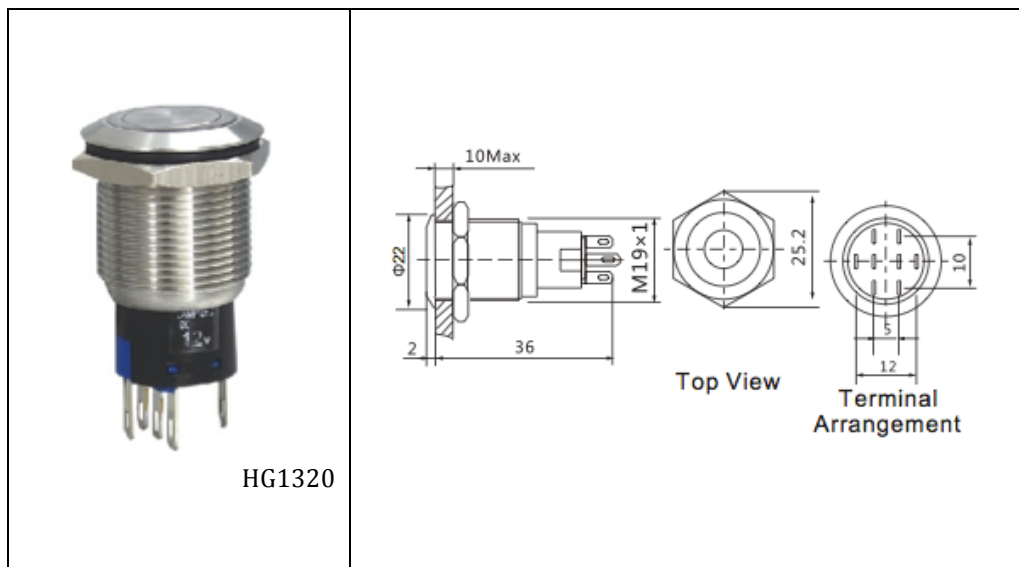

Button Face	Flat Round/Domed
Terminal Type	Pin Terminals (2.8x0.5mm)
Contact Resistance	<50mΩ
Insulation Resistance	>1000MΩ
Dielectric Strength	2000vAC
Operating Temp.	-20 to +55 °C
Mechanical Life	1,000,000 cycles
Electrical Life	50,000 cycles
Panel Thickness	1-10mm
Torque	5-14Nm
Operating Pressure	3-5N
Operating Distance	Approx. 3mm
Contact	Silver Alloy
Base	PBT
Type	Ring Illuminated (LED)
Rated Voltage	6v/12v/24v/36v/110v/220v
Life	40,000 Hours